

DOOSAN

Construction Equipment

DX190W

Engine Power	SAE J1349, net 116 kW (156 HP) @ 1,900 rpm
Operational Weight	17,800 ~ 19,400 kg (39,242 ~ 42,770 lb)
Bucket Capacity (SAE/PCSA)	0.38 ~ 0.93 m ³ (0.5 ~ 1.21 yd ³)



DOOSAN DX190W HYDRAULIC EXCAVATOR : A NEW MODEL WITH NOVEL FEATURES

DX190w

THE NEW DX190W HYDRAULIC EXCAVATOR HAS ALL THE ADVANTAGES OF THE PREVIOUS MODEL, AND NOW OFFERS ADDITIONAL ADDED VALUE TO THE OPERATOR.

The new DX190W was developed with the concept of “providing optimum value to the end user.” In concrete terms, this translates, into :

INCREASED PRODUCTION AND IMPROVED FUEL ECONOMY are attributed to the electronic optimization of the hydraulic system and the new generation DOOSAN engine (Tier III/ Stage III).

IMPROVED ERGONOMICS, increases comfort and excellent all round visibility ensuring a safe and pleasant working environment.

IMPROVED RELIABILITY, is achieved through the use of high performance materials combined with new methods of structural stress analysis, and leads to increased component life expectancy, thus reducing running costs.





ADVANCED FRONT BUSH

- EM bushing (Enhanced Macro-surface)
- Pocket & Dimple surface pattern : Optimized greasing & Trap foreign object
- Wear resistant solid lubricant coating : Noise free & enhanced anti-seizure property
- 30% longer life time than competitors



ADVANCED H-CLASS BUCKET

- Doosan new H-class bucket has the best strength of steel & the optimized design
- Add side cutter / add chamfer and inner plate at member part
- Increase bucket solidity and change casting type



ADVANCED HD CABIN (OPTIONAL)

- ROPS, FOPS optional
- The latest interior (MP3, Joystick, Air suspension seat, etc.)



7 INCH MONITOR

- New, user-friendly LCD color monitor with full access to machine settings and maintenance data.
- Operator can see rear view through new monitor (If customer selects rear view camera option)



TROPICAL HYDRAULIC OIL (ISO VG 68)

- Maintain best performance of your machine by keeping optimum viscosity in tropical area.



PERFORMANCE & PRODUCTIVITY

DX190W

The performance of the DX190W has a direct effect on its productivity. Its new "Common Rail" engine and new EPOS™ controlled hydraulic system have combined to create an unbeatable hydraulic excavator, with a cost/performance ratio that makes the DX190W even more appealing.




DOOSAN ENGINE (DL06)

At the heart of the hydraulic excavator is the new "Common Rail" DOOSAN DL06 engine. It is combined with the new EPOS™ electronic control system, for optimum power and fuel saving.

The new engine produces 156 hp(116 kw/158 PS) at only 1,900 rpm, and more torque, due to its careful design combined with the use of common rail injection and 4 valves per cylinder. These features help optimize combustion and minimize pollution through reduced Nox & particulate emissions.

Increased torque allows efficient use of the power of the hydraulic system.

- Faster working cycles increase productivity.
- Increased torque means the excavator is able to move more easily.
- Energy efficiency reduces fuel consumption.

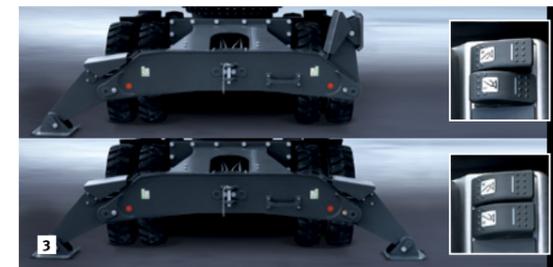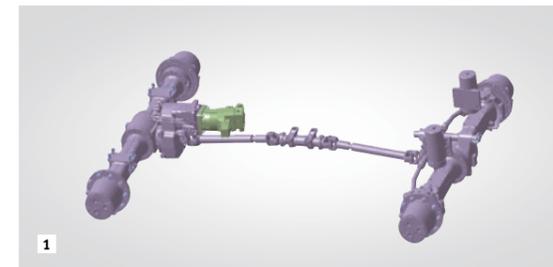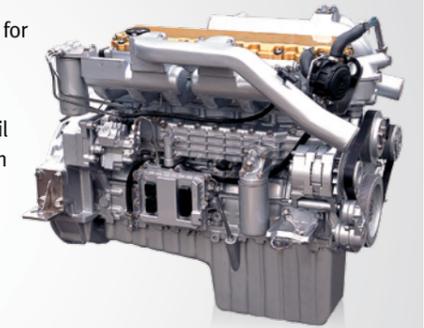

1 NEW DRIVE LINE CONCEPT

The new travel motor and transmission control in the drive line provide comfortable travel due to increased smoothness, improved hydraulic retarding and improved gear shifting.

HEAVY DUTY AXLES

The front axle offers wide oscillating and steering angles. The transmission is mounted directly on the rear axle for protection and optimum ground clearance.

ADVANCED DISC BRAKE SYSTEM

The new disc brake system works directly on the hub instead of the drive shaft to avoid planetary gear backlash. This eliminates the rocking effect associated with working free on wheels. The new axle is designed for low maintenance and the oil change intervals have been increased from 1,000 to 2,000 hours further reducing owning and operating costs.

EXCAVATOR CONTROL

Improved Excavator control by New EPOS™ system The brains of the hydraulic excavator, the EPOS™ (Electronic Power Optimizing system), have been improved, through a CAN (Controller Area Network) communication link, these units are now perfectly synchronised.

2 UNDERCARRIAGE DESIGN

A rigid, welded frame provides excellent durability. Efficient hydraulic lines routing, transmission protection and heavy duty axles make the undercarriage perfect for wheel excavator applications. Both outriggers and dozer blade are pin type for maximum flexibility. An optional work tool restraint bar is available.

3 OUTRIGGERS

The pin type design allows the outriggers to be mounted on the front and/or rear for maximum operating stability when digging or lifting and are individually controlled for leveling on slopes.

4 DOZER BLADE

The pin type design allows the dozer blade to be mounted on the front and/or rear and is used for leveling, clean-up work and for stabilizing the machine during digging applications. The large dozer bottom and parallel design provide minimized ground pressure.

HYDRAULIC PUMP

Considering the property of wheel excavator that intensively performs traveling operation, bent axis piston pump is adopted for its high efficiency and excellent response in high pressure. The Main pump has a capacity of 2x200l/min(@ 1,900rpm) reducing cycle time while a high capacity gear pump improves pilot line efficiency.

SWING DRIVE

Shocks during rotation are minimized, while increased torque is available to ensure rapid cycles.





DURABILITY & RELIABILITY

DX190w

The reliability of an item of plant contributes to its overall lifetime operating costs. DOOSAN uses computer-assisted design techniques, highly durable materials and structures then test these under extreme conditions. Durability of materials and longevity of structures are our first priorities.



D-TYPE FRAME

The D-type frame and chassis frame add strength and minimize distortion due to shocks.



STRESS ANALYSIS DESIGN(FEM) AND INNOVATIVE MANUFACTURING TECHNIQUE PROVIDE A STRONG AND STABLE UNDERCARRIAGE

As Chassis Frame, Outrigger Frame and Dozer Blade are designed by interpretative technique and reliability test using 3 dimension CAD tool, durability and reliability are improved.



1 ADVANCED BUSHING

A highly lubricated metal is used for the boom pivot in order to increase the lifetime and extend the greasing intervals to 250 hours. A rolled bushing, with very fine grooves, has been added to the arm, bucket, dozer, and outrigger pivot; so greasing is only required every 50 hours.

2 POLYMER SHIM

A polymer shim is added to the bucket, dozer, and outrigger pivot to promote extended pin and bushing life.

3 DOZER & OUTRIGGER CYLINDERS PROTECTION COVERS

Large reinforced protective covers have been adopted to completely protect the Dozer & Outrigger cylinders from falling stones etc, while the machine is operating.

4 CAST COUNTERWEIGHT

A Cast Counterweight has been adopted to minimize deformation by external impact. In addition, operating stability has been increased by use of a low center of gravity design.

5 LED (LUMINESCENT DIODE) TYPE STOP LAMPS

The use of LED type Stop Lamps ensures considerably improved average service life compared to the existing standard filament bulbs. Furthermore, the faster lighting speed helps contribute to accident prevention.



RELIEF CUTOFF

The pump continues to supply flow even when the maximum pressure on the system is reached due to severe working environments and large workloads. Relief cutoff technology of DX190W prevents transfer of unnecessary flow to maintain powerful working level at the maximum value while reducing consumption of fuel.





OPTIMIZED LEVER CONTROL & AUTO IDLE

When operator takes a break and leaves the control joystick fixed, both of the engine and the pump are kept in standby mode and prevents unnecessary fuel consumption.



PUMP MATCHING TECHNOLOGY

Engine & pump matching, the new technology of Doosan, fully resolves problems; low responses time of the system, unnecessary fuel consumption. Matching response time between pump and engine efficiently reduces unnecessary fuel consumption as well as exhaust fumes.

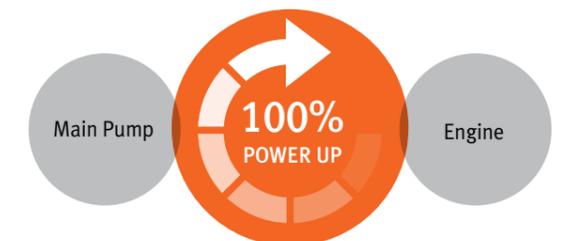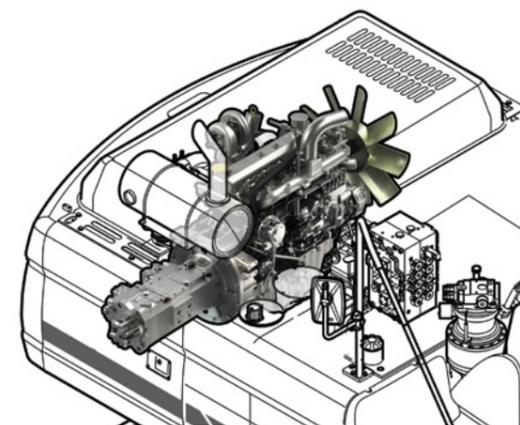



OPERATOR COMFORT

DX190W

The work rate of the hydraulic excavator is directly linked to the performance of its operator. DOOSAN designed the DX190W by putting the operator at the centre of the development goals. The result is significant ergonomic value that improves the efficiency and safety of the operator.



CONTROL LEVER

Very precise control of the equipment increases versatility, safety and facilitates tricky operations requiring great precision. Levelling operations and the movement of lifted loads in particular are made easier and safer. DOOSAN designed the DX225LCA by putting the operator at the center of the development goals. The result is significant ergonomic value that improves the efficiency and safety of the operator. More space, better visibility, air conditioning, a very comfortable seat... These are all elements that ensure that the operator can work for hours and hours in excellent conditions.

AIR SUSPENSION SEAT (OPTIONAL)

Equipped with various functions of adjustment forth and back and, and lumbar support, it reduces the vibration of equipment transmitted during work in an effective way. Also for considering winter working environment, Seat warmer functions equipped.




MONITOR



- 3 power modes for maximum efficiency
 - Power mode
 - Standard mode
 - Economy mode
- 3 work modes to suit your application
 - 1-way mode
 - 2-way mode
 - Digging mode

- 1 Control panel
- 2 Navigation modes
 - Rearview camera, Display selector
- 3 Working modes
 - Auto-idle & Flow rate control

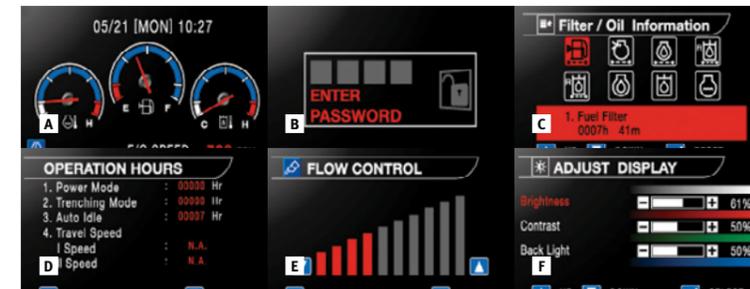

CONTROL PANEL

- A Standard screen
- B Anti-theft protection
- C Filter/oil information
- D Operation history
- E Flow rate control
- F Contrast control



1 STEERING COLUMN

The Forward/Neutral/Reverse & gear selection switch is mounted on the steering column to minimize operator movements while traveling so that safety and operator comfort are ensured. The lower part of Steering Column can be tilted for improved operator comfort.

2 DOZER/OUTRIGGER CONTROL

The Dozer/Outrigger Control Lever, combined with the associated switches, allows for the operator to select between any combination of independent or simultaneous operation of the dozer/ Outriggers.

3 FOOT PEDALS

The position of the Option, Brake and Accelerator Pedal have been set by ergonomic analysis to maximise operating efficiency while minimizing foot movement. The required pedal operating forces have also been decreased to reduce fatigue.

4 COMFORTABLE 2-STAGE SLIDING SEAT

5 CONTROL STAND (TELESCOPIC & TILTING FUNCTION)

6 REAR CAMERA

AIR CONDITIONING

The high performance air conditioning provides an air flow which is adjusted and electronically controlled for the conditions. Five operating modes enable even the most demanding operator to be satisfied.






EASY MAINTENANCE

DX190W

Short maintenance operations at long intervals increase the availability of the equipment on site. DOOSAN has developed the DX190W with a view to high profitability for the user.

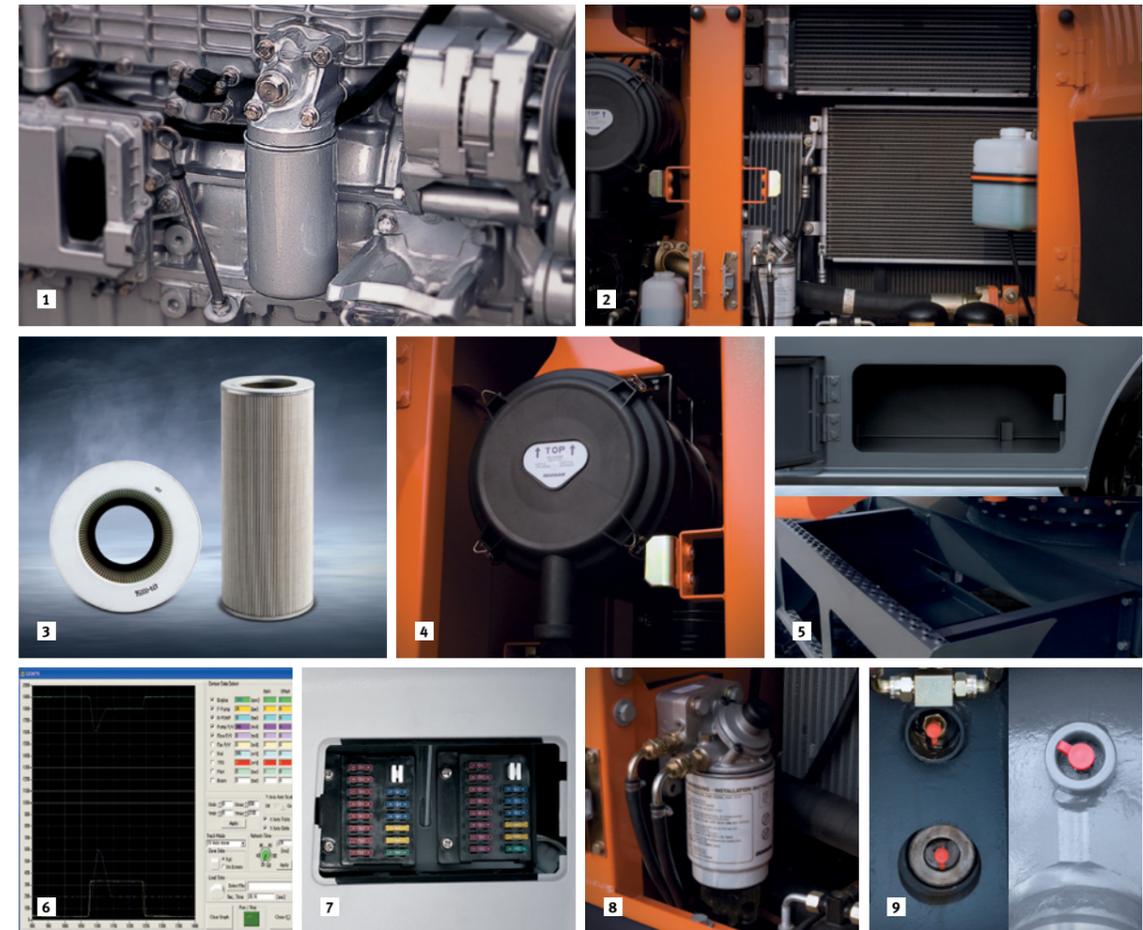

1 ENGINE OIL FILTER

The engine oil filter offers a high level of filtration allowing the oil change interval to be increased to 500 hours. It is easy to access and is positioned to avoid contaminating the surrounding environment.

2 EASY MAINTENANCE

Access to the various radiators is very easy, making cleaning easier. Access to the various parts of the engine is from the top and via side panels.

3 HYDRAULIC OIL RETURN FILTER

The protection of the hydraulic system is made more effective by the use of glass fiber filter technology in the main oil return filter. This means that with more than 99.5% of foreign particles filtered out, the oil change interval is increased.

4 AIR CLEANER

The large capacity forced air cleaner removes over 99% of airborne particles, reducing the risk of engine contamination and making the cleaning and cartridge change intervals greater.

5 TOOL BOX AND STORAGE PLACES

A large sized and lockable tool box is mounted on the left side of undercarriage and the storage places for grease can be provided in the right side of undercarriage.

6 PC MONITORING (DMS)

A PC monitoring function enables connection to the EPOS™ system, allowing various parameters to be checked during maintenance, such as pump pressures, engine rotation speed, etc. and these can be stored and printed for subsequent analysis.

7 CONVENIENT FUSE BOX

The fuse box is conveniently located in a section of the storage compartment behind the operator's seat providing a clean environment and easy access.

8 FUEL PRE-FILTER

High efficiency fuel filtration is attained by the use of multiple filters, including a fuel pre-filter fitted with a water separator that removes most moisture from the fuel.

9 CENTRALIZED FRONT AXLE PIN GREASE INLETS FOR EASY MAINTENANCE

The grease lubricating position of front axle pin is located in front of equipment for easy accessibility.

* Option spec info is included to the images contained in this material and may not be the same with the actual specs.

TELEMATICS SERVICE (OPTIONAL)

GLOBAL PARTS NETWORK

TELECOMMUNICATIONS

Data flow from machine to web




TELEMATICS SERVICE TERMINAL

Telematics Service terminal is installed to machine / connected to EPOS™



TELECOMMUNICATION

GPS, EPOS™ data is sent to designated server by GSM, Satellite telecommunication

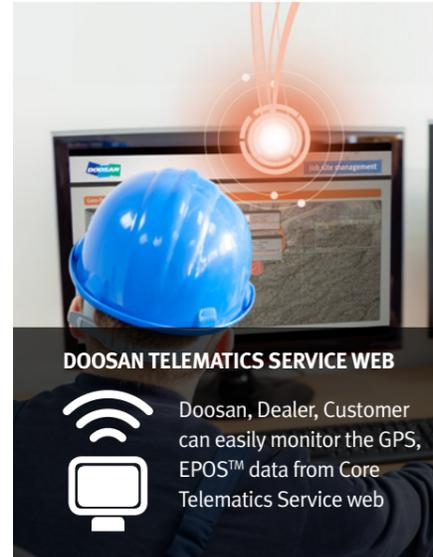

DOOSAN TELEMATICS SERVICE WEB

Doosan, Dealer, Customer can easily monitor the GPS, EPOS™ data from Core Telematics Service web

FUNCTIONS

Doosan Telematics Service provides various functions to support your great performance

TELEMATICS SERVICE BENEFITS

Doosan and dealer support customers to improve work efficiency with timely and responsive services

Customer

- Improve work efficiency
- Timely and preventive service
- Improve operator's skills by comparing work pattern
- Manage fleet more effectively

Dealer


- Better service for customers
- Provide better quality of service
- Maintain machine value
- Better understanding of market needs

Doosan

- Responsive to customer's voice
- Utilize quality-related field data
- Apply customer's usage profile to developing new machine

GLOBAL PDC (PARTS DISTRIBUTION CENTER) NETWORK

Doosan provides fast and precise worldwide delivery of genuine Doosan parts through its global PDC (parts distribution center) network.

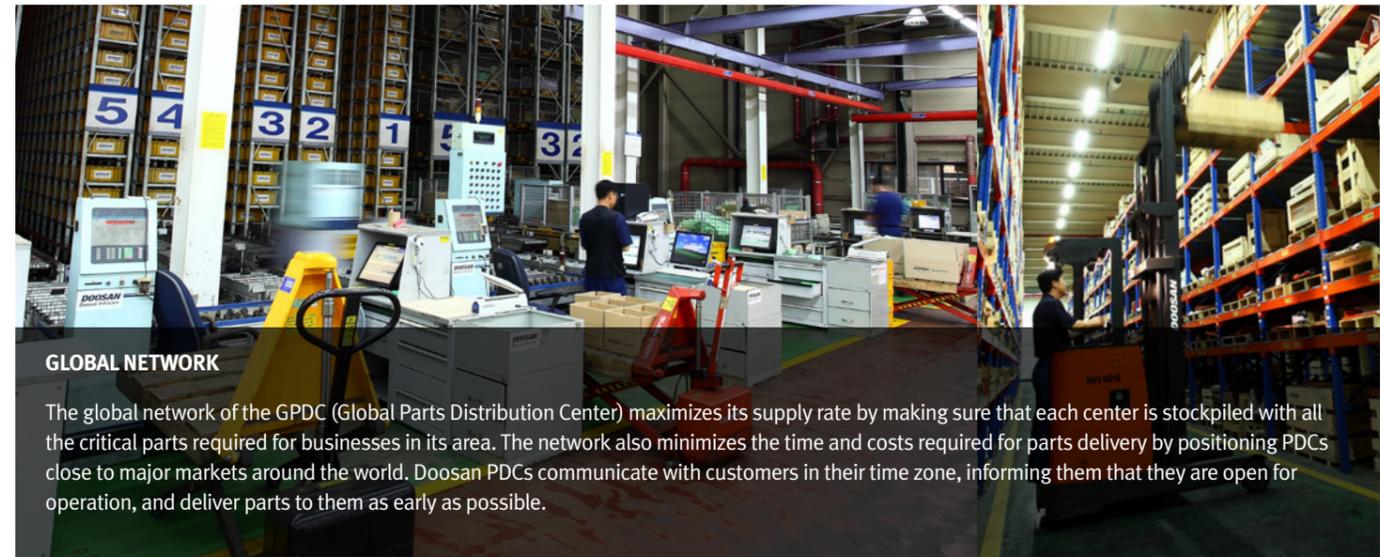

GLOBAL NETWORK

The global network of the GPDC (Global Parts Distribution Center) maximizes its supply rate by making sure that each center is stockpiled with all the critical parts required for businesses in its area. The network also minimizes the time and costs required for parts delivery by positioning PDCs close to major markets around the world. Doosan PDCs communicate with customers in their time zone, informing them that they are open for operation, and deliver parts to them as early as possible.

The Global Parts Distribution Center Network

PDCs had been set up as shown below, including Mother PDC in Ansan, Korea. The seven other PDCs include one in China (Yantai), one in the USA (Chicago), one in Brazil (Campinas), two in Europe (Germany and the UK), one in the Middle East (Dubai), and one in Asia (Singapore).



FUNCTION	EXCAVATOR	WHEEL LOADER	ADT
GPS	Location Geo-fence	All models	All models
E-mail reports	Daily, Weekly, Monthly report	All models	All models
Operation hours	Total operation hours Operation hours by mode	All models Tier 4 only	All models
Maintenance parts	Preventive maintenance by item replacement cycle	All models	Tier 4 only
Fault code/ Warning	Fault code Machine Warnings on Gauge Panel	All models	Tier 4 only
Fuel information	Fuel level Fuel consumption	All models Tier 4 only	All models
Dump capacity	Dump tonnage Count of Work Cycle	N/A	All models

PDC BENEFIT

- Distribution Cost Reduction
- Maximum Parts supply rate
- Shortest distance/time parts delivery
- Real-time service support
- Minimum downtime

Heavy Construction Bucket, which is also called Heavy Duty bucket, is the most commonly used bucket in the construction equipment market and is designed mainly for use in heavy construction but also used in low density mining and quarry application.

Hinge
Optimized reinforced construction for high strength and performance matched to the machine's power.

Adapter
Corner adapter Positioned under Side cutter to increase strength.

Wrapper (Shell)
Shape increases heel clearance and decreases wear rate.

Horizontal Bottom Wear Plates
Protects bottom section and reinforces bucket for greater strength and rigidity. Designed for easily replacement during maintenance repair.

Lip Plate (Cutting Edge)
Beveled edge for better penetration and 500BHN material for high abrasion resistance.

Tooth (Tip)
Designed with mechanical properties that maintain hardness for long wear life in tough digging applications.

Side cutter
Designed for better penetration and used high wear resistant material.

Side Wear Plates
Side plates meet up with bottom wear plates for seamless corner protection.



General Purpose bucket

which is also called General Purpose bucket, is designed for digging and re-handling soft to medium materials e.g. materials with low wear characteristics such as top-soil, loam, coal.



Heavy Duty bucket

which is also called Heavy Duty bucket, is the most commonly used bucket in the construction equipment market and is designed mainly for use in heavy construction but also used in low density mining and quarry application.



Extra Severe Duty Bucket

which is also called X class bucket. The bucket is designed for use in high density mining and quarry application using high strength and high abrasion resistance materials. It can be used in the toughest of applications.


TOOTH

GD (General Duty) Tooth
Optimized design for Doosan's GP and the new General Construction bucket. Suitable for machines ranging from 14 to 70 tons. Recommended for general construction and utility loading applications.

HD (Heavy Duty) Tooth
Optimized design for the Heavy Construction bucket. Suitable for machines ranging from 14 to 70 tons. Recommended for most applications including excavating, trenching, loading and medium density quarries and mining.

SD (Severe Duty) Tooth
Optimized design for the Severe Mining bucket and the Xtreme Mining bucket. Suitable for machines ranging 22 to 70 tons. Recommended for extremely tough quarries and mining application.

BUCKET

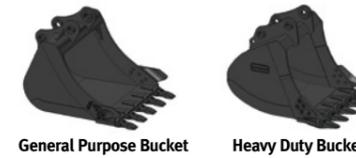

General Purpose Bucket Heavy Duty Bucket

	Capacity (SAE/PCSA)
GENERAL PURPOSE BUCKET	0.38 / 0.45 / 0.57 / 0.70 / 0.76 / 0.80 / 0.93 m ³
HEAVY DUTY BUCKET	0.51 / 0.65 / 0.78 / 0.82 / 0.91 m ³

DEMOLITION



Hydraulic Breaker Fixed Pulverizer Rotating Crusher

	Model	Weight	Tool diameter	Frequency
HYDRAULIC BREAKER	DXB180H	1,720 kg	140 mm	320~580 BPM
	Model	Weight	Max. Jaw opening	Force at Tip
FIXED PULVERIZER	FP14	1,100 kg	680 mm	51 t
ROTATING CRUSHER	RC14	1,250 kg	720 mm	51 t

MATERIAL HANDLING



Multi-Grapple Stone Grapple Wood Grapple Log Grapple Orange Grapple

	Model	Weight	Max Jaw opening	Max. Closing Force	Capacity	
MULTI-GRAPPLE	MG14	1,050 kg	1,744 mm	4.6 t	0.45 m ³	
STONE GRAPPLE	SG18	861 kg	1,800 mm	-	0.34 m ²	
WOOD GRAPPLE	L / P	WG18	800 / 730 kg	1,800 mm	-	0.48 m ²
LOG GRAPPLE	L / P	LG18	935 / 910 kg	1,800 mm	-	0.42 m ²
ORANGE GRAPPLE	OG22	1,300 kg	2,150 mm	-	0.50 m ³	

L : Link type
P : Pendulum type

EARTH MOVING



Clamshell Bucket Plate Compactor Ripper

	Model	Weight	Max. Jaw opening	Capacity
CLAMSHELL BUCKET	CB18	1,200 kg	1,455 mm	0.70 m ³
	Model	Weight	Base plate (WxL)	Impulse force
PLATE COMPACTOR	PC22	1,325 kg	860 x 1,200 mm	11.2 t
	Model	Weight	Length	
RIPPER	RP22	450 kg	1,278 mm	

CONNECTING



Quick Coupler

	Model	Weight	Bucket Pin dia.	Working rage (Pin to Pin)
QUICK COUPLER	QC22	319 kg	80 mm	445 ~ 514 mm

TECHNICAL SPECIFICATIONS

ENGINE

Model
Doosan DL06 “Common Rail” engine with direct fuel injection and electronic control, 4 valves per cylinder, vertical injectors, water cooled, turbo charged with air to air intercooler. The emission levels are well below the values required for stage III.
Number of cylinders
6
Nominal flywheel power
116 kW(156HP) @ 1,900 rpm (SAE J1349, net)
Max torque
70 kgf.m(686 Nm) at 1,400 rpm
Piston displacement
5,890 cc (359 cu.in)
Bore & stroke
Φ100 mm x 125 mm (3.9” X 4.8”)
Starter
24 V / 4.5 kW
Batteries
2 x 12 V / 100 Ah
Air cleaner
Double element with auto dust evacuation.

DRIVE

Fully hydrostatic driven, 3 speed power shift transmission, variable displacement, high torque, axial piston motor, foot pedal controls provide smooth travel, hub reduction type front steering axle and rear rigid axle.

Travel speed (High)
36 km/h (22.4 mph)
Maximum traction force
11,075 kgf (24,416 lbf)
Maximum grade
35° / 70%

WEIGHT

Operating weight, including 5,200 mm (17’1”) one-piece boom and 2,600 mm (8’6”) one-piece boom, or 1,940+3,820 mm (6’4” + 12’6”) two-piece boom, 2,300mm (7’7”) arm, operator, lubricant, coolant, full fuel tank and the standard equipment. Weights are with 616kg (1,358 lb) bucket.

Undercarriage type		Operating weight (One-piece Boom)	Operating weight (Two-piece Boom)
Front attach	Rear attach		
Cradle	Dozer	17,770 kg (39,176 lb)	18,270 kg (40,278 lb)
Cradle	Outrigger	17,920 kg (39,507 lb)	18,410 kg (40,587 lb)
Dozer	Outrigger	18,850 kg (41,557 lb)	19,330 kg (42,615 lb)
Outrigger	Dozer	18,910 kg (41,689 lb)	19,390 kg (42,748 lb)
Outrigger	Outrigger	19,050 kg (41,998 lb)	19,530 kg (43,056 lb)

HYDRAULIC SYSTEM

The heart of the system is the e-EPOS (Electronic Power Optimizing System). It allows the efficiency of the system to be optimized for all working conditions and minimizes fuel consumption. The new e-EPOS is connected to the engine electronic control via a data transfer link to harmonize the operation of the engine and hydraulics.

- The hydraulic system enables independent or combined operations.
- Cross-sensing pump system for fuel savings.
- Auto deceleration system.
- Two operating modes, two power modes.
- Button control of flow in auxiliary equipment circuits.
- Computer-aided pump power control.

Main pumps
2 variable displacement axial piston pumps max flow: 2 x 200 l/min (2 X 52.8US gpm, 2 X 44 Imp gpm)
Pilot pump
Gear pump - max flow: 26.1 l/min (6.9US gpm, 5.7 Imp gpm)
Maximum system pressure
Boom/arm/Bucket : Normal mode : 330 kgf/cm ² (324 bar) Power mode : 350 kgf/cm ² (343 bar) Travel : 350 kgf/cm ² (343 bar) Swing : 270 kgf/cm ² (265 bar)

SWING MECHANISM

- An axial piston motor with two-stage planetary reduction gear is used for the swing.
- Increased swing torque reduces swing time.
- Internal induction-hardened gear.
- Internal gear and pinion immersed in lubricant bath.
- The swing brake for parking is activated by spring and released hydraulically.

Swing speed: 0 to 10.9 rpm

UNDERCARRIAGE

Heavy-duty frame, all-welded stress-relieve structure. Top grade materials used for toughness. Specially heat-treated connecting pins. 10.0-20-14PR double tires with tire spacer. Front axle oscillating hydraulically. Dozer and outrigger can be installed in front and rear interchangeably. 18.0-19.5-20PR tubeless single and 10.0-20-16PR double tires as an option.

HYDRAULIC CYLINDERS

The piston rods and cylinder bodies are made of high-strength steel. A shock absorbing mechanism is fitted in all cylinders to ensure shock-free operation and extend piston life.

[One-piece Boom]			
Cylinders	Quantity	Bore x Rod diameter x stroke	
Boom	2	120 X 85 X 1,195mm(4.7” X 3.3” X 3’11”)	
Arm	1	125 X 90 X 1,470mm(4.9” X 3.5” X 4’10”)	
Bucket	1	115 X 80 X 1,025mm(4.5” X 3.1” X 3’4”)	
[Two-piece Boom]			
Cylinders	Quantity	Bore x Rod diameter x stroke	
Boom	2	120 X 85 X 1,030mm(4.7” X 3.3” X 3’5”)	
Two-piece Boom	1	160 X 95 X 760mm(6.3” X 3.7” X 2’6”)	
Arm	1	125 X 90 X 1,470mm(4.9” X 3.5” X 4’10”)	
Bucket	1	115 X 80 X 1,025mm(4.5” X 3.1” X 3’4”)	

BUCKET

Capacity		Width		Weight	Recommendation				
					5,200mm (17’1”) One-piece Boom			5,360mm (17’7”) Two-piece Boom	
PCSA, heaped	CECE heaped	Without side cutters	With side cutters		2,200mm (7’3”)Arm	2,600mm (8’6”)Arm	3,100mm (10’2”)Arm	2,300mm (7’7”)Arm	2,600mm (8’6”)Arm
0.38m ³ (0.5yd ³)	0.35m ³	604mm (2’)	640mm (2’1”)	441 kg (972 lb)	A	A	A	A	A
0.45m ³ (0.59yd ³)	0.41m ³	727mm (2’5”)	775mm (2’7”)	465 kg (1,025 lb)	A	A	A	A	A
0.57m ³ (0.75yd ³)	0.51m ³	865.2mm (2’10”)	913.2mm (3’)	520 kg (1,146 lb)	A	A	B	A	A
0.70m ³ (0.92yd ³)	0.62m ³	1,015mm (3’4”)	1,063mm (3’6”)	567 kg (1,250 lb)	A	B	C	A	A
0.76m ³ (1yd ³)	0.67m ³	1,079mm (3’6”)	1,127mm (3’8”)	602 kg (1,327 lb)	B	B	C	A	B
0.8m ³ (1.05yd ³)	0.7m ³	1,123mm (3’8”)	1,171mm (3’10”)	616 kg (1,358 lb)	B	C	-	B	C
0.93m ³ (1.22yd ³)	0.81m ³	1,267mm (4’2”)	1,315mm (4’4”)	664 kg (1,332 lb)	C	-	-	C	-

A. Suitable for materials with density of 2,000 kg/m³ (3,370 lb/cu•yd) or less
 B. Suitable for materials with density of 1,600 kg/m³ (2,700 lb/cu•yd) or less
 C. Suitable for materials with density of 1,100 kg/m³ (1,850 lb/cu•yd) or less

ENVIRONMENT

Noise levels comply with environmental regulations (dynamic values).

LwA External sound level
101 dB(A) (2000/14/EC)
LPA Operator sound level
74 dB(A) (ISO 6396)


REFILL CAPACITIES

Fuel tank
310 l (81.9 US gal, 68.2 Imp gal)
Cooling system (Radiator capacity)
24 l (6.3 US gal, 5.3 Imp gal)
Engine oil
25 l (6.6 US gal, 5.5 Imp gal)
Swing drive
3.8 l (10 US gal, 0.8 Imp gal)
Power train(each)
Front Axle 2.5 l (0.66 US gal, 0.55 Imp gal) Rear Axle 2.5 l (0.66 US gal, 0.55 Imp gal) Transmission 2.5 l (0.66 US gal, 0.55 Imp gal)

Hydraulic system
205 l (54.2 US gal, 45.1 Imp gal)
Hydraulic tank
116 l (51.7 US gal, 43.1 Imp gal)

DIMENSIONS


[One-piece Boom]

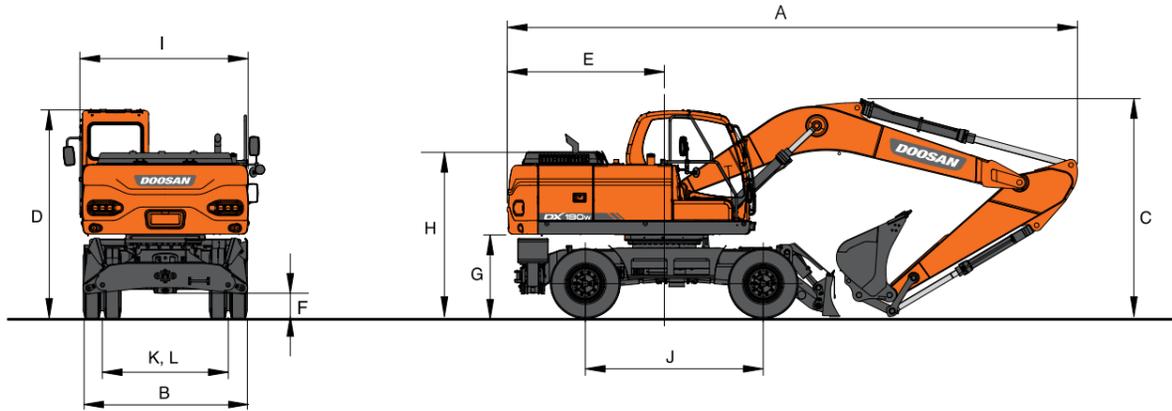

DIMENSIONS

Boom type (One-piece)	5,200mm(17'1")		
Arm type	2,400mm(8'6")	2,600mm(8'6")	3,100mm(10'2")
A Shipping Length	8,715mm(28'7")	8,659mm(28'5")	8,507mm(24'6")
B Shipping Width	→	2,496mm(8'2")	←
C Shipping Height (Boom)	3,212mm(10'6")	3,310mm(10'10")	3,772mm(12'5")
D Height Over Cab.	→	3,135mm(10'3")	←
E Counter Weight Swing Clearance	→	2,450mm(8')	←
F Ground Clearance	→	350mm(1'2")	←
G Counter Weight Clearance	→	1,249mm(4'1")	←
H Engine Cover Height	→	2,530mm(8'4")	←
I Upper Housing Width	→	2,494mm(8'2")	←
J Wheel Base	→	2,700mm(8'10")	←
K,L Tread Width	→	1,944mm(6'5")	←

[Two-piece Boom]

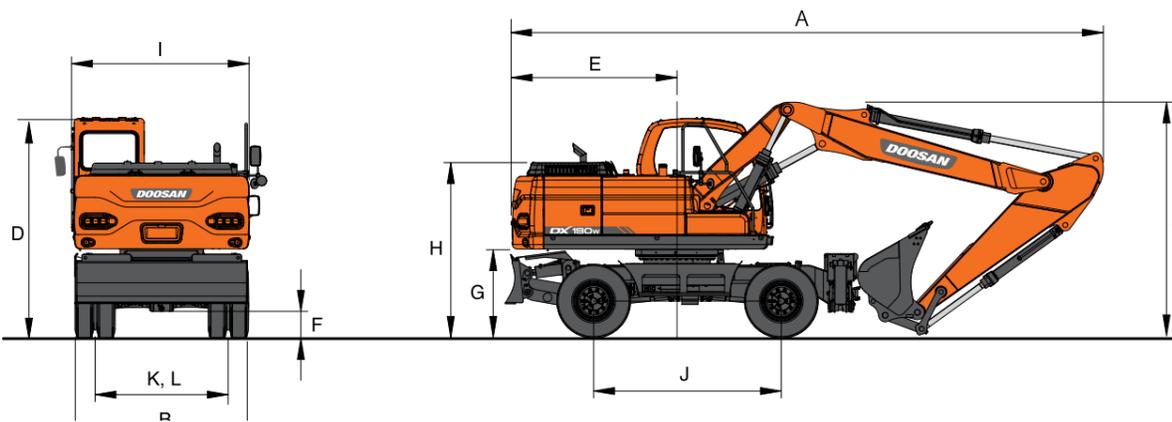


DIMENSIONS

Boom type (Two-piece)	5,360mm(17'7")		
Arm type	2,300mm(7'7")	2,600mm(8'6")	
A Shipping Length	8,860mm(29'1")	8,610mm(28'3")	
B Shipping Width	2,496mm(8'2")		←
C Shipping Height (Boom)	3,140mm(10'4")	3,360mm(11')	
D Height Over Cab.	3,135mm(10'3")		←
E Counter Weight Swing Clearance	2,450mm(8')		←
F Ground Clearance	350mm(1'2")		←
G Counter Weight Clearance	1,249mm(4'1")		←
H Engine Cover Height	2,530mm(8'4")		←
I Upper Housing Width	2,494mm(8'2")		←
J Wheel Base	2,700mm(8'10")		←
K,L Tread Width	1,944mm(6'5")		←

WORKING RANGES


[One-piece Boom]

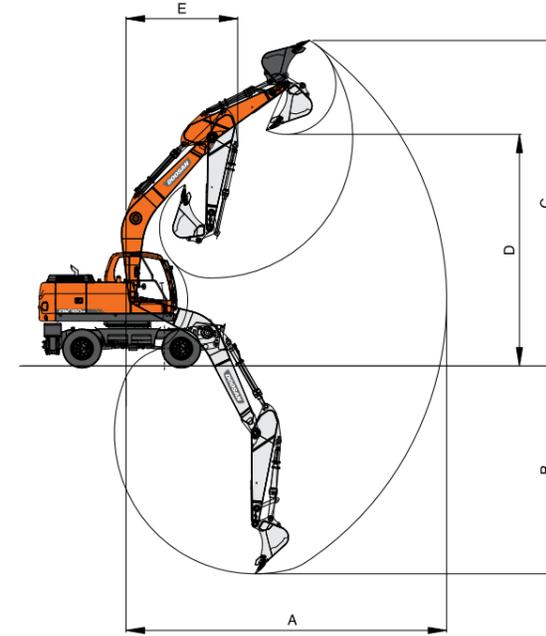

WORKING RANGES

Boom type (One-piece)	5,200mm(17'1")		
Arm type	2,200mm(7'3")	2,600mm(8'6")	3,100mm(10'2")
A Max. Digging Reach	8,830mm(29')	9,200mm(30'2")	9,560mm(31'4")
B Max. Digging Depth	5,565mm(18'3")	5,965mm(19'7")	6,465mm(21'3")
C Max. Digging Height	9,115mm(29'11")	9,340mm(30'8")	9,270mm(30'5")
D Max. Dump Height	6,420mm(21'1")	6,650mm(21'10")	6,645mm(21'10")
E Min. Swing Radius	3,195mm(10'6")	3,200mm(10'6")	3,185mm(10'5")

[Two-piece Boom]

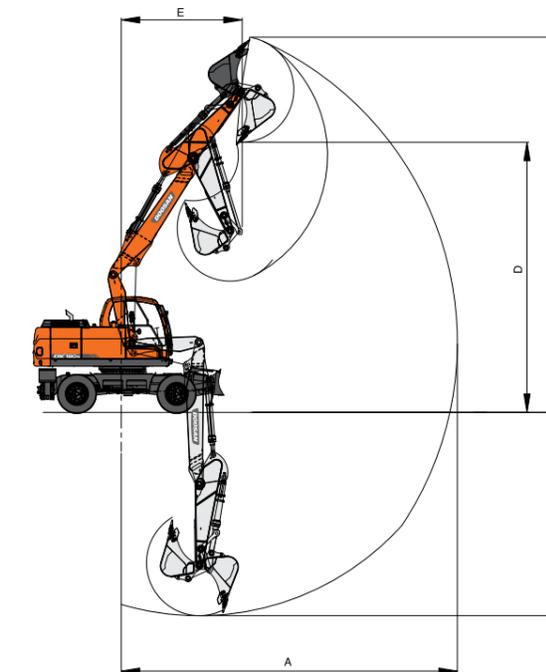

WORKING RANGES

Boom type (Two-piece)	5,360mm(17'7")	
Arm type	2,300mm(7'7")	2,600mm(8'6")
A Max. Digging Reach	9,235mm(30'3")	9,530mm(31'3")
B Max. Digging Depth	5,600mm(18'4")	5,900mm(19'4")
C Max. Digging Height	10,260mm(33'8")	10,510mm(34'6")
D Max. Dump Height	7,415mm(24'4")	7,660mm(25'2")
E Min. Swing Radius	2,965mm(9'9")	3,160mm(10'4")

DIGGING FORCE (ISO)


Bucket (PCSA)	0.38m ³	0.45m ³	0.57m ³	0.70m ³	0.76m ³	0.80m ³	0.93m ³
Digging force	14,200 kgf						
	139.25 kN						
	31,305 lbf						

Arm	2,200mm	2,300mm	2,600mm	3,100mm
Digging force	10,800 kgf	9,900 kgf	9,300 kgf	8,500 kgf
	105.91 kN	97.08 kN	91.20 kN	83.36 kN
	23,810 lbf	21,816 lbf	20,503 lbf	18,739 lbf

At power boost (ISO)

LIFTING CAPACITY

[One-piece Boom]

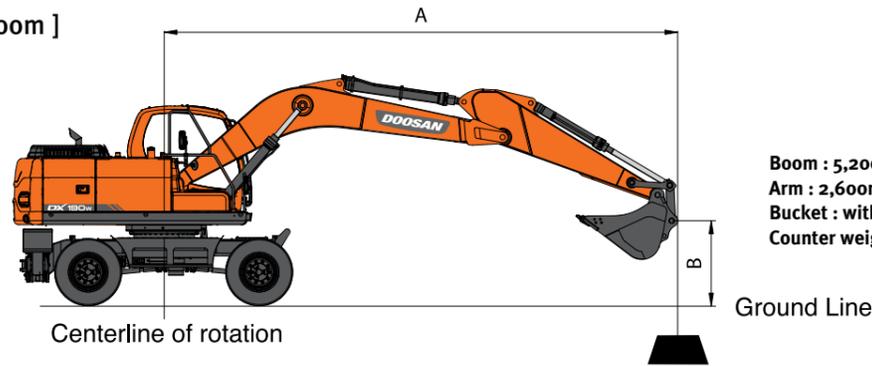


Boom : 5,200mm(17'1")
 Arm : 2,600mm(8'6")
 Bucket : without bucket
 Counter weight : 3,200 kg(7,055 lb)

Metric Unit : 1,000kg

A(m)	B(m)	Chassis Frame Attachment	Max. Reach												A(m)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
			2	3	4	5	6	7	8	9	10	11	12	13		14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446

LIFTING CAPACITY

[One-piece Boom]

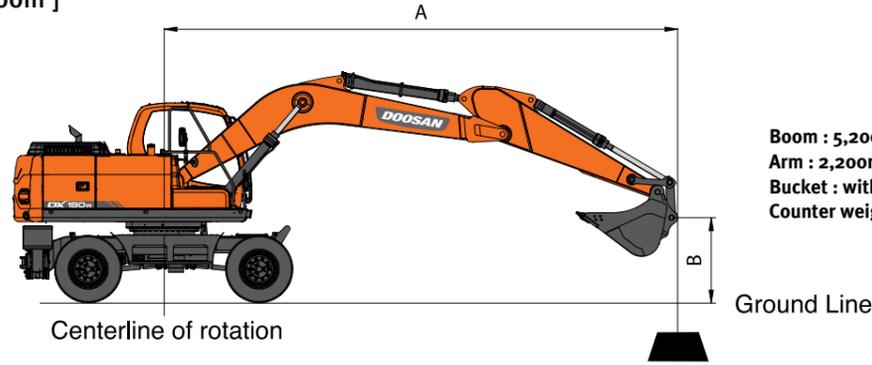

Boom : 5,200mm(17'1")
 Arm : 2,200mm(7'3")
 Bucket : without bucket
 Counter weight : 3,200 kg(7,055 lb)

Metric

Unit : 1,000kg

A(m)	B(m)	Chassis Frame Attachment	2		3		4		5		6		7		Max. Reach		A(m)
			☺	☹	☺	☹	☺	☹	☺	☹	☺	☹	☺	☹	☺	☹	
7	5.31	R-Rear Dozer Only Up							*6.00	4.14					*5.02	3.76	5.31
		R-Rear Dozer Only Down							*6.00	5.39					*5.02	4.88	
		R-Outrigger Only Down							*6.00	*6.00					*5.02	*5.02	
		F-Dozer + R-Outrigger Down							*6.00	*6.00					*5.02	*5.02	
6	6.14	R-Rear Dozer Only Up							*5.91	4.15	5.22	3.13			*4.77	3.01	6.14
		R-Rear Dozer Only Down							*5.91	5.39	5.11	4.05			*4.77	3.90	
		R-Outrigger Only Down							*5.91	*5.91	4.95	*5.54			4.77	*4.77	
		F-Dozer + R-Outrigger Down							*5.91	*5.91	*5.54	*5.54			*4.77	*4.77	
5	6.72	R-Rear Dozer Only Up							*6.30	4.08	5.21	3.11			4.37	2.61	6.72
		R-Rear Dozer Only Down							*6.30	5.32	5.09	4.04			4.27	3.39	
		R-Outrigger Only Down							*6.30	*6.30	4.94	5.83			4.13	*4.69	
		F-Dozer + R-Outrigger Down							*6.30	*6.30	*5.94	5.83			*4.69	*4.69	
4	7.10	R-Rear Dozer Only Up				*8.23	5.45		6.79	3.97	5.15	3.06	4.08	2.43	3.99	2.38	7.10
		R-Rear Dozer Only Down				*8.23	7.28	6.64	5.20	5.03	3.98	3.99	3.16	3.90	3.09		
		R-Outrigger Only Down				*8.23	*8.23	6.44	*6.97	4.88	5.76	3.86	4.54	3.77	4.43		
		F-Dozer + R-Outrigger Down				*8.23	*8.23	*6.97	*6.97	*6.26	5.76	*5.53	4.54	*4.72	4.43		
3	7.33	R-Rear Dozer Only Up				9.41	5.20	6.64	3.84	5.07	2.99	4.05	2.40	*3.78	2.24	7.33	
		R-Rear Dozer Only Down				9.20	7.00	6.50	5.06	4.96	3.90	3.96	3.13	3.69	2.92		
		R-Outrigger Only Down				8.92	*9.73	6.29	7.54	4.80	5.68	3.83	4.50	3.57	4.20		
		F-Dozer + R-Outrigger Down				*9.73	*9.73	*7.77	7.54	*6.69	5.68	*6.06	4.50	*4.84	4.20		
2	7.42	R-Rear Dozer Only Up				9.16	4.99	6.50	3.72	4.99	2.92	4.01	2.37	3.69	2.18	7.42	
		R-Rear Dozer Only Down				8.95	6.77	6.36	4.93	4.88	3.83	3.91	3.09	3.61	2.85		
		R-Outrigger Only Down				8.67	10.67	6.16	7.39	4.72	5.60	3.79	4.46	3.49	4.10		
		F-Dozer + R-Outrigger Down				*10.96	10.67	*8.50	7.39	*7.12	5.60	*6.26	4.46	*5.05	4.10		
1	7.36	R-Rear Dozer Only Up				9.01	4.87	6.40	3.63	4.93	2.86	3.97	2.34	3.71	2.18	7.36	
		R-Rear Dozer Only Down				8.81	6.64	6.26	4.84	4.81	3.77	3.88	3.06	3.62	2.86		
		R-Outrigger Only Down				8.53	10.51	6.05	7.28	4.66	5.53	3.75	4.43	3.50	4.12		
		F-Dozer + R-Outrigger Down				*11.56	10.51	*8.99	7.28	*7.43	5.53	*6.38	4.43	*5.38	4.12		
0 (Ground)	7.16	R-Rear Dozer Only Up				8.96	4.83	6.34	3.58	4.89	2.83	3.96	2.32	3.84	2.25	7.16	
		R-Rear Dozer Only Down				8.76	6.59	6.20	4.79	4.77	3.73	3.86	3.04	3.75	2.95		
		R-Outrigger Only Down				8.47	10.45	6.00	7.22	4.62	5.49	3.73	4.41	3.62	4.27		
		F-Dozer + R-Outrigger Down				*11.58	10.45	*9.15	7.22	*7.53	5.49	*6.33	4.41	*5.87	4.27		
-1	6.81	R-Rear Dozer Only Up				*8.80	7.39	8.96	4.83	6.33	3.57	4.88	2.82	4.11	2.41	6.81	
		R-Rear Dozer Only Down				*8.80	*8.80	8.76	6.59	6.18	4.77	4.76	3.72	4.02	3.16		
		R-Outrigger Only Down				*8.80	*8.80	8.47	10.45	5.98	7.21	4.61	5.48	3.88	4.59		
		F-Dozer + R-Outrigger Down				*8.80	*8.80	*11.15	10.45	*8.96	7.21	*7.35	5.48	*6.19	4.59		
-2	6.27	R-Rear Dozer Only Up				*9.45	*9.45	*12.76	7.46	9.00	4.87	6.35	3.59	4.90	2.84	6.27	
		R-Rear Dozer Only Down				*9.45	*9.45	*12.76	10.65	8.80	6.63	6.21	4.79	4.79	3.75		
		R-Outrigger Only Down				*9.45	*9.45	*12.76	*12.76	8.52	*10.30	6.01	7.23	4.63	5.51		
		F-Dozer + R-Outrigger Down				*9.45	*9.45	*12.76	*12.76	*10.30	*10.30	*8.34	7.23	*6.69	5.51		
-3	5.50	R-Rear Dozer Only Up				*13.23	*13.23	*10.85	7.56	*8.84	4.94	6.43	3.66	5.62	3.25	5.50	
		R-Rear Dozer Only Down				*13.23	*13.23	*10.85	10.77	*8.84	6.72	6.28	4.86	5.49	4.29		
		R-Outrigger Only Down				*13.23	*13.23	*10.85	*10.85	8.61	*8.84	6.08	*7.04	5.32	*6.00		
		F-Dozer + R-Outrigger Down				*13.23	*13.23	*10.85	*10.85	*8.84	*8.84	*7.04	*7.04	*6.00	*6.00		
-4	4.36	R-Rear Dozer Only Up				*7.78	7.75	*6.14	5.09					*5.33	4.54	4.36	
		R-Rear Dozer Only Down				*7.78	*7.78	*6.14	*6.14					*5.33	*5.33		
		R-Outrigger Only Down				*7.78	*7.78	*6.14	*6.14					*5.33	*5.33		
		F-Dozer + R-Outrigger Down				*7.78	*7.78	*6.14	*6.14					*5.33	*5.33		

Feet

Unit : 1,000lb


A(ft)	B(ft)	Chassis Frame Attachment	10'		15'		20'		Max. Reach		A(ft)						
			☺	☹	☺	☹	☺	☹	☺	☹							
25	15.10	R-Rear Dozer Only Up									*11.75	10.27					
		R-Rear Dozer Only Down									*11.75	*11.75					
		R-Outrigger Only Down										*11.75	*11.75				
		F-Dozer + R-Outrigger Down										*11.75	*11.75				
20	19.92	R-Rear Dozer Only Up									*10.56	6.76					
		R-Rear Dozer Only Down									*10.56	8.75					
		R-Outrigger Only Down										*10.56	*10.56				
		F-Dozer + R-Outrigger Down										*10.56	*10.56				
15	22.65	R-Rear Dozer Only Up							*15.16	10.13	11.16	6.66	9.21	5.50			
		R-Rear Dozer Only Down							*15.16	13.30	10.91	8.64	9.00	7.14			
		R-Outrigger Only Down								*15.16	*15.16	10.57	12.48	8.72	10.25		
		F-Dozer + R-Outrigger Down								*15.16	*15.16	*13.28	12.48	*10.35	10.25		
10	24.03	R-Rear Dozer Only Up							16.80	9.58	10.92	6.45	8.35	4.96			
		R-Rear Dozer Only Down							16.44	12.71	10.68	8.42	8.16	6.46			
		R-Outrigger Only Down								15.93	*18.52	10.34	12.23	7.89	9.28		
		F-Dozer + R-Outrigger Down								*18.52	*18.52	*14.54	12.23	*10.65	9.28		
5	24.30	R-Rear Dozer Only Up							16.25	9.11	10.68	6.24	8.13	4.80			
		R-Rear Dozer Only Down							15.89	12.20	10.44	8.19	7.94	6.27			
		R-Outrigger Only Down								15.38	18.64	10.10	11.98	7.67	9.03		
		F-Dozer + R-Outrigger Down								*21.34	18.64	*15.82	11.98	*11.45	9.03		
0 (Ground)	23.50	R-Rear Dozer Only Up							15.99	8.89	10.54	6.11	8.46	4.97			
		R-Rear Dozer Only Down							15.63	11.96	10.29	8.05	8.26	6.51			
		R-Outrigger Only Down								15.12	18.36	9.95	11.83	7.99	9.42		
		F-Dozer + R-Outrigger Down								*22.20	18.36	*16.33	11.83	*12.95	9.42		
-5	21.50	R-Rear Dozer Only Up							*25.67	15.96	15.99	8.89	10.54	6.11	9.57	5.60	
		R-Rear Dozer Only Down							*25.67	22.73	15.63	11.96	10.30	8.06	9.35	7.35	
		R-Outrigger Only Down								*25.67	*25.67	15.12	18.36	9.96	11.83	9.04	10.70
		F-Dozer + R-Outrigger Down								*25.67	*25.67	*20.97	18.36	*15.30	11.83	*13.65	10.70
-10	17.90	R-Rear Dozer Only Up							*23.44	16.28	16.21	9.08		12.55	7.25		
		R-Rear Dozer Only Down							*23.44	23.10	15.85	12.17		12.26	9.57		
		R-Outrigger Only Down								*23.44	*23.44	15.34	*17.01		11.87	*13.20	
		F-Dozer + R-Outrigger Down								*23.44	*23.44	*17.01	*17.01		*13.20	*13.20	

- Ratings are based on SAE J1097
- Load point is the end of arm.
- * Rated loads are based on hydraulic capacity.
- Rated loads do not exceed 87% of hydraulic capacity or 75% of tipping capacity.

☺ : Rating Over Front
 ☹ : Rating Over Side or 360 degree

LIFTING CAPACITY

[Two-piece Boom]

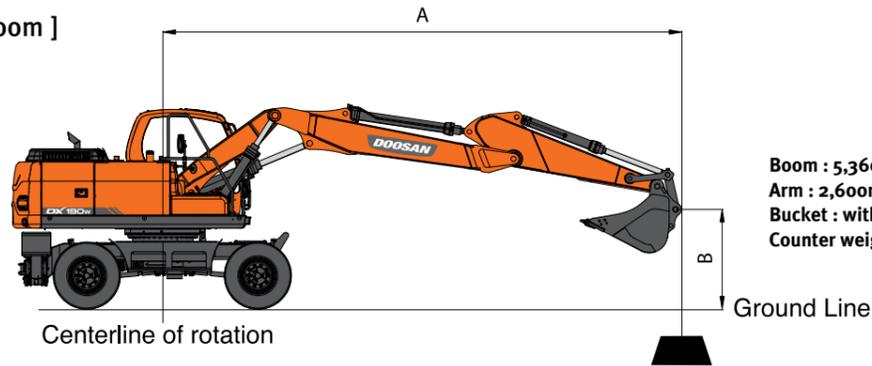

Boom : 5,360mm(17'7")
 Arm : 2,600mm(8'6")
 Bucket : without bucket
 Counter weight : 3,200 kg(7,055 lb)

Metric Unit : 1,000kg

A(m)	B(m)	Chassis Frame Attachment	3		4		5		6		7		8		Max. Reach		A(m)	
			☺	☹	☺	☹	☺	☹	☺	☹	☺	☹	☺	☹	☺	☹		
9	3.67	R-Rear Dozer Only Up													*4.03	*4.03	3.67	
		R-Rear Dozer Only Down													*4.03	*4.03		
		R-Outrigger Only Down														*4.03		*4.03
		F-Dozer + R-Outrigger Down														*4.03		*4.03
8	5.22	R-Rear Dozer Only Up					*4.47	4.15							*3.22	*3.22	5.22	
		R-Rear Dozer Only Down					*4.47	*4.47							*3.22	*3.22		
		R-Outrigger Only Down					*4.47	*4.47								*3.22		*3.22
		F-Dozer + R-Outrigger Down					*4.47	*4.47								*3.22		*3.22
7	6.23	R-Rear Dozer Only Up					*4.18	*4.18	*4.31	3.16					*2.89	*2.89	6.23	
		R-Rear Dozer Only Down					*4.18	*4.18	*4.31	4.09					*2.89	*2.89		
		R-Outrigger Only Down					*4.18	*4.18	*4.31	*4.31						*2.89		*2.89
		F-Dozer + R-Outrigger Down					*4.18	*4.18	*4.31	*4.31						*2.89		*2.89
6	6.95	R-Rear Dozer Only Up					*4.29	4.19	*4.45	3.18					*2.72	2.50	6.95	
		R-Rear Dozer Only Down					*4.29	*4.29	*4.45	4.11					*2.72	*2.72		
		R-Outrigger Only Down					*4.29	*4.29	*4.45	*4.45						*2.72		*2.72
		F-Dozer + R-Outrigger Down					*4.29	*4.29	*4.45	*4.45						*2.72		*2.72
5	7.47	R-Rear Dozer Only Up			*5.00	*5.00	*4.78	4.11	*4.67	3.14	4.14	2.48			*2.63	2.23	7.47	
		R-Rear Dozer Only Down			*5.00	*5.00	*4.78	*4.78	*4.67	4.07	4.05	3.22			*2.63	*2.63		
		R-Outrigger Only Down			*5.00	*5.00	*4.78	*4.78	*4.67	*4.67	3.92	4.61				*2.63		*2.63
		F-Dozer + R-Outrigger Down			*5.00	*5.00	*4.78	*4.78	*4.67	*4.67	*4.72	4.61				*2.63		*2.63
4	7.81	R-Rear Dozer Only Up			*6.36	5.51	*5.54	4.00	*5.11	3.08	4.11	2.46			*2.60	2.06	7.81	
		R-Rear Dozer Only Down			*6.36	*6.36	*5.54	5.24	5.07	4.01	4.02	3.19			*2.60	*2.60		
		R-Outrigger Only Down			*6.36	*6.36	*5.54	*5.54	4.91	*5.11	3.89	4.58				*2.60		*2.60
		F-Dozer + R-Outrigger Down			*6.36	*6.36	*5.54	*5.54	*5.11	*5.11	*4.91	4.58				*2.60		*2.60
3	8.02	R-Rear Dozer Only Up			*8.04	5.26	*6.48	3.87	5.09	3.01	4.07	2.42	*2.91	1.98	*2.61	1.97	8.02	
		R-Rear Dozer Only Down			*8.04	7.07	*6.48	5.10	4.98	3.92	3.98	3.15	*2.91	2.58	*2.61	2.57		
		R-Outrigger Only Down			*8.04	*8.04	6.34	*6.48	4.82	*5.67	3.85	4.53	*2.91	*2.91	*2.61	*2.61		
		F-Dozer + R-Outrigger Down			*8.04	*8.04	*6.48	*6.48	*5.67	*5.67	*5.23	4.53	*2.91	*2.91	*2.61	*2.61		
2	8.10	R-Rear Dozer Only Up			9.23	5.04	6.54	3.74	5.01	2.93	4.02	2.37	3.32	1.96	*2.66	1.93	8.10	
		R-Rear Dozer Only Down			9.02	6.83	6.39	4.96	4.90	3.84	3.93	3.10	3.24	2.56	*2.66	2.52		
		R-Outrigger Only Down			8.74	*9.64	6.19	*7.43	4.74	5.62	3.80	4.48	3.13	3.68	*2.66	*2.66		
		F-Dozer + R-Outrigger Down			*9.64	*9.64	*7.43	*7.43	*6.26	5.62	*5.60	4.48	*3.82	3.68	*2.66	*2.66		
1	8.05	R-Rear Dozer Only Up			9.06	4.90	6.43	3.65	4.94	2.87	3.98	2.33	3.30	1.95	*2.75	1.93	8.05	
		R-Rear Dozer Only Down			8.86	6.68	6.28	4.86	4.83	3.78	3.88	3.06	3.23	2.55	*2.75	2.53		
		R-Outrigger Only Down			8.58	10.57	6.08	7.32	4.67	5.55	3.76	4.43	3.12	*3.44	*2.75	*2.75		
		F-Dozer + R-Outrigger Down			*10.68	10.57	*8.23	7.32	*6.81	5.55	*5.95	4.43	*3.44	*3.44	*2.75	*2.75		
0 (Ground)	7.87	R-Rear Dozer Only Up			8.99	4.84	6.36	3.59	4.89	2.83	3.95	2.31			*2.89	1.98	7.87	
		R-Rear Dozer Only Down			8.78	6.61	6.22	4.80	4.78	3.73	3.86	3.03			*2.89	2.60		
		R-Outrigger Only Down			8.50	10.49	6.01	7.24	4.62	5.50	3.73	4.40			*2.89	*2.89		
		F-Dozer + R-Outrigger Down			*11.29	10.49	*8.79	7.24	*7.23	5.50	*6.23	4.40			*2.89	*2.89		
-1	7.55	R-Rear Dozer Only Up			*6.81	*6.81	8.97	4.83	3.56	4.87	2.81	3.94	2.30		*3.10	2.10	7.55	
		R-Rear Dozer Only Down			*6.81	*6.81	8.77	6.60	6.19	4.77	4.76	3.71	3.85	3.03		*3.10		2.75
		R-Outrigger Only Down			*6.81	*6.81	8.48	10.47	5.99	7.21	4.60	5.48	3.72	4.40		*3.10		*3.10
		F-Dozer + R-Outrigger Down			*6.81	*6.81	*11.60	10.47	*9.08	7.21	*7.47	5.48	*6.36	4.40		*3.10		*3.10
-2	7.07	R-Rear Dozer Only Up			*10.44	7.44	9.00	4.85	6.34	3.57	4.88	2.81	3.97	2.33		*3.42	2.30	7.07
		R-Rear Dozer Only Down			*10.44	*10.44	8.80	6.62	6.20	4.78	4.77	3.72	3.88	3.05		*3.42	3.02	
		R-Outrigger Only Down			*10.44	*10.44	8.51	10.50	6.00	7.22	4.61	5.49	3.75	4.43		*3.42	*3.42	
		F-Dozer + R-Outrigger Down			*10.44	*10.44	*11.44	10.50	*9.08	7.22	*7.46	5.49	*4.71	4.43		*3.42	*3.42	
-3	6.10	R-Rear Dozer Only Up					9.07	4.91	6.39	3.61	4.93	2.86			4.83	2.81	6.10	
		R-Rear Dozer Only Down					8.86	6.69	6.24	4.82	4.82	3.77			4.72	3.69		
		R-Outrigger Only Down					8.58	10.58	6.04	7.27	4.66	5.54			4.56	5.42		
		F-Dozer + R-Outrigger Down					*10.86	10.58	*8.67	7.27	*6.98	5.54			*6.82	5.42		

Feet Unit : 1,000lb


A(ft)	B(ft)	Chassis Frame Attachment	10'		15'		20'		25'		Max. Reach		A(ft)	
			☺	☹	☺	☹	☺	☹	☺	☹	☺	☹		
25	18.54	R-Rear Dozer Only Up												18.54
		R-Rear Dozer Only Down												
		R-Outrigger Only Down												
		F-Dozer + R-Outrigger Down												
20	22.62	R-Rear Dozer Only Up												22.62
		R-Rear Dozer Only Down												
		R-Outrigger Only Down												
		F-Dozer + R-Outrigger Down												
15	25.04	R-Rear Dozer Only Up												25.04
		R-Rear Dozer Only Down												
		R-Outrigger Only Down												
		F-Dozer + R-Outrigger Down												
10	26.30	R-Rear Dozer Only Up												26.30
		R-Rear Dozer Only Down												
		R-Outrigger Only Down												
		F-Dozer + R-Outrigger Down												
5	26.54	R-Rear Dozer Only Up												26.54
		R-Rear Dozer Only Down												
		R-Outrigger Only Down												
		F-Dozer + R-Outrigger Down												
0 (Ground)	25.81	R-Rear Dozer Only Up												25.81
		R-Rear Dozer Only Down												
		R-Outrigger Only Down												
		F-Dozer + R-Outrigger Down												
-5	24.01	R-Rear Dozer Only Up												24.01
		R-Rear Dozer Only Down												
		R-Outrigger Only Down												
		F-Dozer + R-Outrigger Down												
-10	19.68	R-Rear Dozer Only Up												19.68
		R-Rear Dozer Only Down												
		R-Outrigger Only Down												
		F-Dozer + R-Outrigger Down												

- Ratings are based on SAE J1097
- Load point is the end of arm.
- * Rated loads are based on hydraulic capacity.
- Rated loads do not exceed 87% of hydraulic capacity or 75% of tipping capacity.

☺ : Rating Over Front
 ☹ : Rating Over Side or 360 degree

LIFTING CAPACITY

[Two-piece Boom]

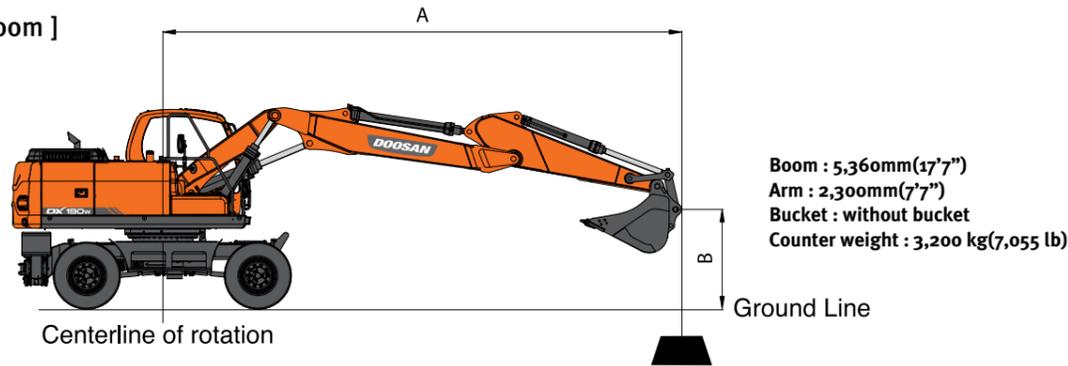

Metric

Unit : 1,000kg

A(m)	B(m)	Chassis Frame Attachment	3		4		5		6		7		Max. Reach		A(m)
			☺	☹	☺	☹	☺	☹	☺	☹	☺	☹	☺	☹	
8		R-Rear Dozer Only Up											*3.49	*3.49	4.74
		R-Rear Dozer Only Down											*3.49	*3.49	
		R-Outrigger Only Down											*3.49	*3.49	
		F-Dozer + R-Outrigger Down											*3.49	*3.49	
7		R-Rear Dozer Only Up					*4.58	4.16					*3.08	*3.08	5.84
		R-Rear Dozer Only Down					*4.58	*4.58					*3.08	*3.08	
		R-Outrigger Only Down					*4.58	*4.58					*3.08	*3.08	
		F-Dozer + R-Outrigger Down					*4.58	*4.58					*3.08	*3.08	
6		R-Rear Dozer Only Up					*4.63	4.14	*4.77	3.13			*2.89	2.67	6.60
		R-Rear Dozer Only Down					*4.63	*4.63	*4.77	4.06			*2.89	*2.89	
		R-Outrigger Only Down					*4.63	*4.63	*4.77	*4.77			*2.89	*2.89	
		F-Dozer + R-Outrigger Down					*4.63	*4.63	*4.77	*4.77			*2.89	*2.89	
5		R-Rear Dozer Only Up			*5.47	*5.47	*5.10	4.07	*4.93	3.11	4.10	2.44	*2.79	2.36	7.14
		R-Rear Dozer Only Down			*5.47	*5.47	*5.10	*5.10	*4.93	4.03	4.01	3.18	*2.79	*2.79	
		R-Outrigger Only Down			*5.47	*5.47	*5.10	*5.10	*4.93	*4.93	3.88	*4.26	*2.79	*2.79	
		F-Dozer + R-Outrigger Down			*5.47	*5.47	*5.10	*5.10	*4.93	*4.93	*4.26	*4.26	*2.79	*2.79	
4		R-Rear Dozer Only Up			*6.86	5.43	*5.86	3.95	5.14	3.05	4.08	2.43	*2.76	2.17	7.51
		R-Rear Dozer Only Down			*6.86	*6.86	*5.86	5.19	5.03	3.97	3.99	3.16	*2.76	*2.76	
		R-Outrigger Only Down			*6.86	*6.86	*5.86	*5.86	4.87	*5.34	3.86	4.54	*2.76	*2.76	
		F-Dozer + R-Outrigger Down			*6.86	*6.86	*5.86	*5.86	*5.34	*5.34	*5.13	4.54	*2.76	*2.76	
3		R-Rear Dozer Only Up			*8.55	5.18	6.63	3.82	5.06	2.97	4.04	2.39	*2.77	2.06	7.72
		R-Rear Dozer Only Down			*8.55	6.99	6.49	5.05	4.95	3.89	3.95	3.12	*2.77	2.70	
		R-Outrigger Only Down			*8.55	*8.55	6.28	*6.78	4.79	5.67	3.82	4.50	*2.77	*2.77	
		F-Dozer + R-Outrigger Down			*8.55	*8.55	*6.78	*6.78	*5.88	5.67	*5.41	4.50	*2.77	*2.77	
2		R-Rear Dozer Only Up			9.15	4.98	6.49	3.70	4.98	2.90	4.00	2.35	*2.82	2.01	7.80
		R-Rear Dozer Only Down			8.95	6.76	6.35	4.92	4.87	3.82	3.91	3.08	*2.82	2.64	
		R-Outrigger Only Down			8.66	*10.08	6.15	7.39	4.71	5.59	3.78	4.46	*2.82	*2.82	
		F-Dozer + R-Outrigger Down			*10.08	*10.08	*7.68	7.39	*6.44	5.59	*5.75	4.46	*2.82	*2.82	
1		R-Rear Dozer Only Up			9.01	4.86	6.40	3.62	4.92	2.85	3.96	2.32	*2.92	2.02	7.75
		R-Rear Dozer Only Down			8.81	6.64	6.25	4.83	4.80	3.76	3.87	3.04	*2.92	2.65	
		R-Outrigger Only Down			8.53	*9.51	6.05	7.28	4.65	5.53	3.74	4.42	*2.92	*2.92	
		F-Dozer + R-Outrigger Down			*9.51	*9.51	*8.42	7.28	*6.95	5.53	*6.06	4.42	*2.92	*2.92	
0 (Ground)		R-Rear Dozer Only Up			8.96	4.82	6.34	3.57	4.88	2.81	3.94	2.30	*3.08	2.08	7.56
		R-Rear Dozer Only Down			8.76	6.59	6.20	4.78	4.76	3.72	3.85	3.02	*3.08	2.74	
		R-Outrigger Only Down			8.48	10.47	5.99	7.22	4.61	5.48	3.72	4.40	*3.08	*3.08	
		F-Dozer + R-Outrigger Down			*11.13	10.47	*8.90	7.22	*7.32	5.48	*6.29	4.40	*3.08	*3.08	
-1		R-Rear Dozer Only Up	*7.07	*7.07	8.97	4.82	6.32	3.56	4.86	2.80	3.94	2.30	*3.32	2.22	7.23
		R-Rear Dozer Only Down	*7.07	*7.07	8.76	6.60	6.18	4.76	4.75	3.71	3.85	3.03	*3.32	2.91	
		R-Outrigger Only Down	*7.07	*7.07	8.48	10.47	5.98	7.21	4.59	5.47	3.72	4.40	*3.32	*3.32	
		F-Dozer + R-Outrigger Down	*7.07	*7.07	*11.57	10.47	*9.11	7.21	*7.49	5.47	*6.33	4.40	*3.32	*3.32	
-2		R-Rear Dozer Only Up	*11.45	7.46	9.01	4.86	6.34	3.57	4.88	2.82			*3.70	2.46	6.73
		R-Rear Dozer Only Down	*11.45	10.67	8.80	6.63	6.20	4.78	4.77	3.73			*3.70	3.23	
		R-Outrigger Only Down	*11.45	*11.45	8.52	10.51	6.00	7.23	4.61	5.49			*3.70	*3.70	
		F-Dozer + R-Outrigger Down	*11.45	*11.45	*11.29	10.51	*9.00	7.23	*7.37	5.49			*3.70	*3.70	

Feet

Unit : 1,000lb


A(ft)	B(ft)	Chassis Frame Attachment	10'		15'		20'		25'		Max. Reach		A(ft)		
			☺	☹	☺	☹	☺	☹	☺	☹	☺	☹			
25		R-Rear Dozer Only Up										*7.27	*7.27	17.09	
		R-Rear Dozer Only Down										*7.27	*7.27		
		R-Outrigger Only Down										*7.27	*7.27		
		F-Dozer + R-Outrigger Down										*7.27	*7.27		
20		R-Rear Dozer Only Up					*10.07	*10.07	*10.59	6.74			*6.40	5.98	21.46
		R-Rear Dozer Only Down					*10.07	*10.07	*10.59	8.73			*6.40	*6.40	
		R-Outrigger Only Down					*10.07	*10.07	*10.59	*10.59			*6.40	*6.40	
		F-Dozer + R-Outrigger Down					*10.07	*10.07	*10.59	*10.59			*6.40	*6.40	
15		R-Rear Dozer Only Up	*15.84	*15.84	*12.36	10.09	11.15	6.64	7.86	4.65			*6.11	4.99	24.01
		R-Rear Dozer Only Down	*15.84	*15.84	*12.36	*12.36	10.91	8.63	7.68	6.07			*6.11	*6.11	
		R-Outrigger Only Down	*15.84	*15.84	*12.36	*12.36	10.57	*11.17	7.42	8.73			*6.11	*6.11	
		F-Dozer + R-Outrigger Down	*15.84	*15.84	*12.36	*12.36	*11.17	*11.17	*8.92	8.73			*6.11	*6.11	
10		R-Rear Dozer Only Up					*16.14	9.54	10.91	6.42	7.78	4.58	*6.10	4.55	25.31
		R-Rear Dozer Only Down					*16.14	12.68	10.66	8.40	7.60	6.00	*6.10	5.95	
		R-Outrigger Only Down					15.91	*16.14	10.32	12.22	7.35	8.65	*6.10	*6.10	
		F-Dozer + R-Outrigger Down					*16.14	*16.14	*12.77	12.22	*11.35	8.65	*6.10	*6.10	
5		R-Rear Dozer Only Up					16.24	9.07	10.66	6.20			*6.31	4.43	25.57
		R-Rear Dozer Only Down					15.88	12.18	10.42	8.17			*6.31	5.81	
		R-Outrigger Only Down					15.37	18.64	10.08	11.97			*6.31	*6.31	
		F-Dozer + R-Outrigger Down					*19.73	18.64	*14.55	11.97			*6.31	*6.31	
0 (Ground)		R-Rear Dozer Only Up					15.99	8.86	10.51	6.07			*6.80	4.59	24.81
		R-Rear Dozer Only Down					15.63	11.95	10.27	8.02			*6.80	6.03	
		R-Outrigger Only Down					15.12	18.37	9.93	11.81			*6.80	*6.80	
		F-Dozer + R-Outrigger Down					*21.73	18.37	*15.87	11.81			*6.80	*6.80	
-5		R-Rear Dozer Only Up	*20.88	15.98	15.99	8.86	10.50	6.06					*7.72	5.13	22.93
		R-Rear Dozer Only Down	*20.88	*20.88	15.62	11.94	10.26	8.01					*7.72	6.73	
		R-Outrigger Only Down	*20.88	*20.88	15.12	18.37	9.92	11.80					*7.72	*7.72	
		F-Dozer + R-Outrigger Down	*20.88	*20.88	*22.04	18.37	*16.19	11.80					*7.72	*7.72	

1. Ratings are based on SAE J1097
2. Load point is the end of arm.
3. * Rated loads are based on hydraulic capacity.
4. Rated loads do not exceed 87% of hydraulic capacity or 75% of tipping capacity.


☺ : Rating Over Front
 ☹ : Rating Over Side or 360 degree

UNDERCARRIAGE


Undercarriage with front cradle and rear outrigger / front cradle and rear dozer

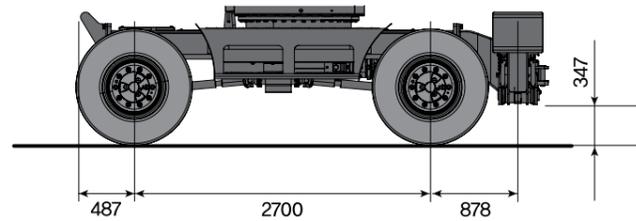



▲ Front Cradle and Rear outrigger

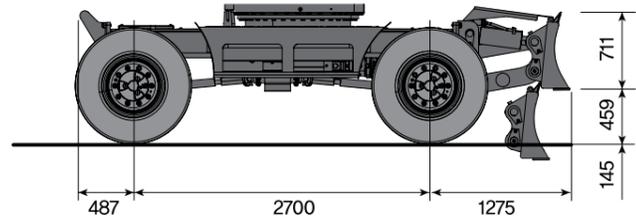


▲ Front Cradle and Rear Dozer

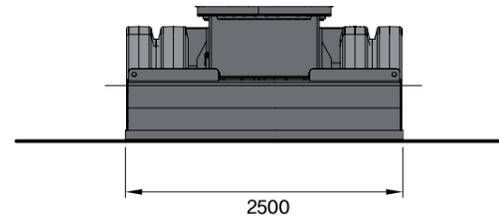


Undercarriage with front outrigger and rear dozer

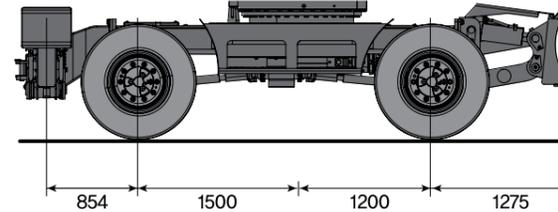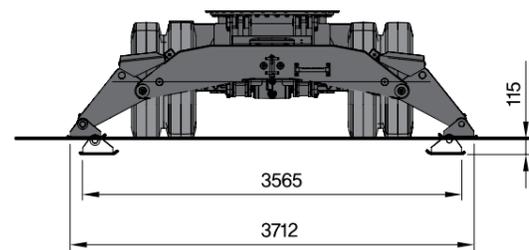

Undercarriage with front outrigger and rear outrigger / front dozer and rear outrigger

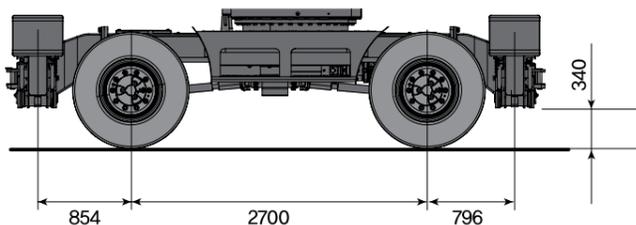

▲ Front Outrigger and Rear Outrigger

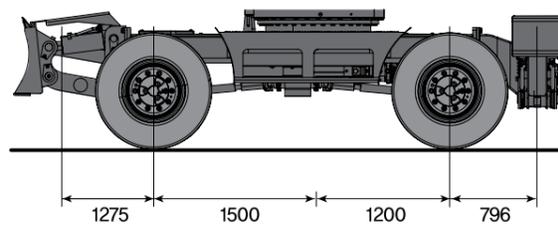

▲ Front Dozer and Rear Outrigger

STANDARD AND OPTIONAL EQUIPMENT

STANDARD EQUIPMENT

Hydraulic system

- Boom and arm flow regeneration
- Boom and arm holding valves
- Swing anti-rebound valves
- Spare ports(valve)
- One-touch power boost

Cabin & Interior

- Viscous cab mounts
- Air conditioner
- Adjustable suspension seat with head rest and adjustable arm rest
- Pull-up type front window and removable lower front window
- Room light
- Intermittent windshield wiper
- Cigarette lighter and ashtray
- Cup holder
- Hot & Cool box
- LCD color monitor panel
- Engine speed(RPM) control dial
- AM/FM radio and cassette player
- Remote radio ON/OFF switch
- 12V spare powers socket
- Serial communication port for laptop PC interface
- Joystick lever with 3 switches
- Sunvisor
- Sun roof
- wiper

Safety

- Large handrails and step
- Punched metal anti-slip plates
- Seat belt
- Hydraulic safety lock lever
- Safety glass
- Hammer for emergency escape
- Right and left rearview mirrors
- Reverse travel alarm
- Emergency engine stop
- LED stop lamps

Others

- Double element air cleaner
- Dust screen for radiator/oil cooler/charged air cooler
- Engine overheat prevention system
- Engine restart prevention system
- Self-diagnostic system
- Large capacity alternator(24V, 60 amps)
- Electric horn
- Halogen working lights(frame mounted 2, boom mounted 2)
- Fuel filler pump
- 3.2ton countweight

Undercarriage

- 10.0-20-14PR double tires
- Heavy duty axles
- Parallel dozer blade & individually controlled outriggers
- Tool box
- Front axle oscillation auto lock

OPTIONAL EQUIPMENT

Some of these optional equipments may be standard in some markets. Some of these optional equipments cannot be available on some markets. You must check with the local DOOSAN dealer to know about the availability or to release the adaptation following the needs of the applications.

Safety

- Boom and arm hose rupture protection valve
- Overload warning device
- Cabin Top/Front guard(ISO 10262, FOGS standard)
- Travel & swing alarm
- Rotation beacon
- Mirror & Lamp on counter weight

Cabin & Interior

- Air suspension seat
- MP3/CD player
- Rain shield
- 2 front lamps
- 4 front + 2 rear lamps

Others

- Piping for crusher
- Piping for quick clamp
- Piping for front attachment rotation
- Breaker filter
- Lower wiper
- Fuel heater


Undercarriage

- 10.0-20-16PR double tire / 18.0-19.5-20PR single tire

Doosan is

Since 1896, Doosan, the oldest company in Korea, has evolved with its people. The company grew up rapidly for last 10 years with reputation. For human-oriented vision, Doosan has been building constructions, energy, machines, infra structures globally. As a global leader of infra structure, Doosan continues its vision to make human-oriented future.

First in Korea, Doosan self-developed excavators in 1985 and continued building versatile construction machines including excavators, wheel loaders, articulated dump trucks to execute its human-oriented philosophy. Doosan became a global leader of heavy construction machine industry by achieving global sales line, producing line, and distribution line. Along with large production bases in Korea, China, USA, Belgium, Czech, Brazil, Doosan has 1400 dealer networks and Doosan is providing reliable products and trusted solutions for your stable business at no risk.

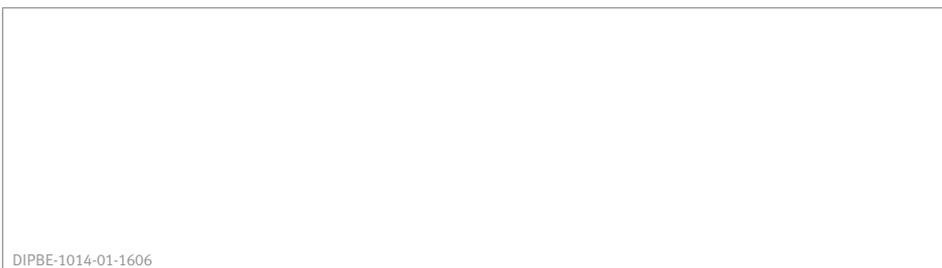

Doosan Infracore Korea Office (HQ)
27F, Doosan Tower, 275, Jangchungdan-ro,
Jung-gu, Seoul, Korea(04563)
Tel : 82 2 3398 8114

www.doosaninfracore.com/ce/

DIPBE-1014-01-1606

Materials and Specifications in the catalogue are subject to change without notice.